




FC S Series

Flocculators

Independent positions to allow optimal analysis conditions
and highly reproducible results

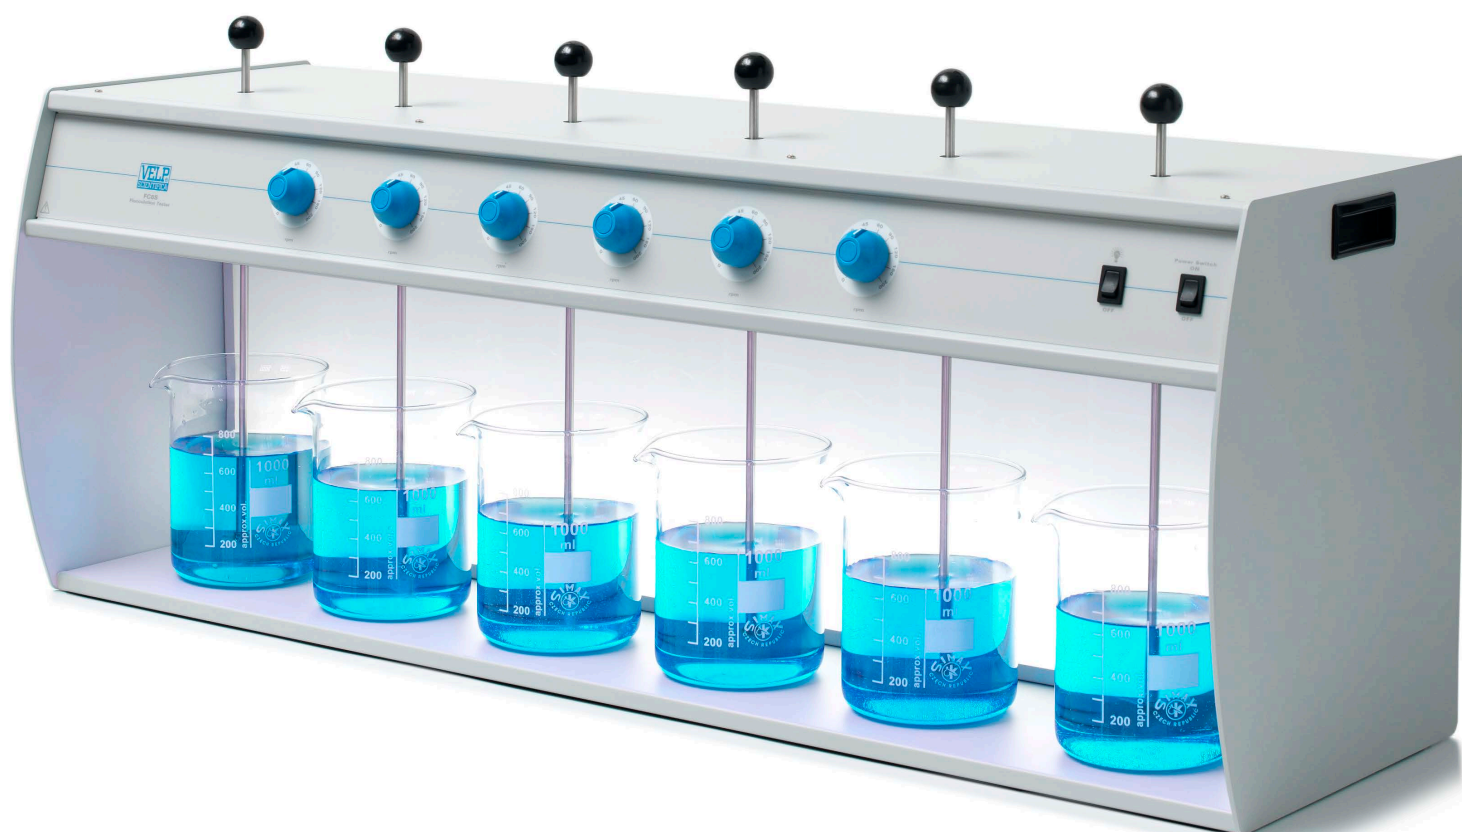

Independent Control and Easy to use

Flocculators in 4 and 6 positions with independent stirring speed setting and illuminated back panel to allow standard conditions to be met during Jar Testing for water treatment plants.

- Independently selectable speeds 10-15-30-45-60-90-120-150-200-300 rpm
- Manage and simulate different conditions in parallel in one single instrument
- Stirring rods adjustable in height without tools
- Illuminated back panel to simplify sample observation
- Strong resistance to chemical and mechanical corrosion



INSTRUMENT - CODE

FC4S	100-240 V / 50-60 Hz	F105A0111
FC6S	100-240 V / 50-60 Hz	F105A0112

TECHNICAL DATA

	FC4S	FC6S
CONSTRUCTION MATERIAL	Epoxy painted metal structure	Epoxy painted metal structure
NUMBER OF SAMPLES	4 positions	6 positions
BACK PANEL	Disconnectable illuminated	Disconnectable illuminated
STAINLESS STEEL STIRRING RODS	Adjustable in height by a selflocking chuck	Adjustable in height by a selflocking chuck
PLURISELECTOR	Settable individual speed for each rod	Settable individual speed for each rod
ELECTRONIC SPEED CONTROL	10 - 15 - 30 - 45 - 60 - 90 -120 - 150 - 200 - 300 rpm	10 - 15 - 30 - 45 - 60 - 90 -120 - 150 - 200 - 300 rpm
POWER	18 W	23 W
DIMENSIONS (WXHXD)	645x347x260 mm (25.4x13.7x10.2 in)	935x347x260 mm (36.8x13.7x10.2 in)
WEIGHT	12.5 kg (27.5 lb)	18 kg (39.6 lb)



We reserve the right to make technical alterations
We do not assume liability for errors in printing, typing or transmission

VELP Official Partner

DESIGNED AND MANUFACTURED IN ITALY



ITALY - HQ
Via Stazione 16
20865 Usmate (MB) Italy
Tel. +39 039 628811
velpitalia@velp.com

INDIA
velpindia@velp.com

USA
155 Keyland Court, Bohemia
NY 11716 - U.S.
Tel. +1 631 573 6002
velpusa@velp.com

CHINA
Xinlong Rd Building 28, Lane 1333
Shanghai city - China
Tel. +86 18017557329
velpchina@velp.com